

# BS-867 Black

## Polyamide Hot Melt Resin

- ❑ Molding resin suitable for automotive applications
- ❑ Good versatility for broad process and performance
- ❑ Flammability UL94:V0

**BS-867 black** is a pure copolymer polyamide hot melt resin, non reactive and solvent free, specially designed for Low Pressure Molding applications. It is mainly used for molding of electronic/electric components, connectors and cables.

### Properties

Physical Properties	Value	Unit
Viscosity [ASTM D3236]	3.0-4.0	Pa · s
Softening Point [ASTM D3461]	175-190	°C
Water Content	<0.2	%
Density	~1	g/cm <sup>3</sup>
Water Absorption, immersed at 23 °C [ISO 62]	2.8	%
Thermal Properties	Value	Unit
Vicat Temperature [ISO 306]	63	°C
Glass Transition Temperature	-50	°C
Mechanical Properties	Value	Unit
Yield Strength, 50 mm/min at 23 °C [ISO 527]	>2.8	MPa
Strength at Break, 50 mm/min at 23 °C [ISO 527]	6.1	MPa
Elongation at Break, 50 mm/min at 23 °C [ISO 527]	>200	%
Young's Modulus, 50 mm/min at 23 °C [ISO 527]	83	MPa
Hardness [ISO 868]	45	D
Electrical Properties	Value	Unit
Transversal Resistivity [IEC 60093]	$2.9 \times 10^{12}$	$\Omega \cdot \text{cm}$
Dielectric Rigidity [IEC 60243-1]	20	kV/mm
Relative Permittivity, 50 Hz at 23 °C [IEC 60250]	5.6	F/m

Supplied by all CAPLINQ Global entities

#### Europe

Industrieweg 15E,  
1566JN Assendelft  
The Netherlands  
Phone: +31 (20) 893 2224  
Email: info@caplinq.com

#### Canada

80 Sirocco Crescent  
Ottawa ON, K2S 2C9  
Canada  
Phone: +1 (613) 482-2215  
Email: info@caplinq.com



#### North America

36927 Schoolcraft Rd  
Livonia, MI 48150  
United States  
Phone: +1 (313) 558-8243  
Email: info@caplinq.com


#### South East Asia

S-08-07 Persiaran Triangle  
B Lepas, Penang 11900  
Malaysia  
Phone: +60(12)4302223  
Email: info@caplinq.com

## Recommended Processing Conditions

Processing Conditions	Value	Unit
Melting Temperature Range	210-230	°C
Mold Temperature Range	20-60	°C
Drying Time	8	h
Drying Temperature	70	°C
Processing Moisture Content	<0.2	%

Viscosity curve versus temperature

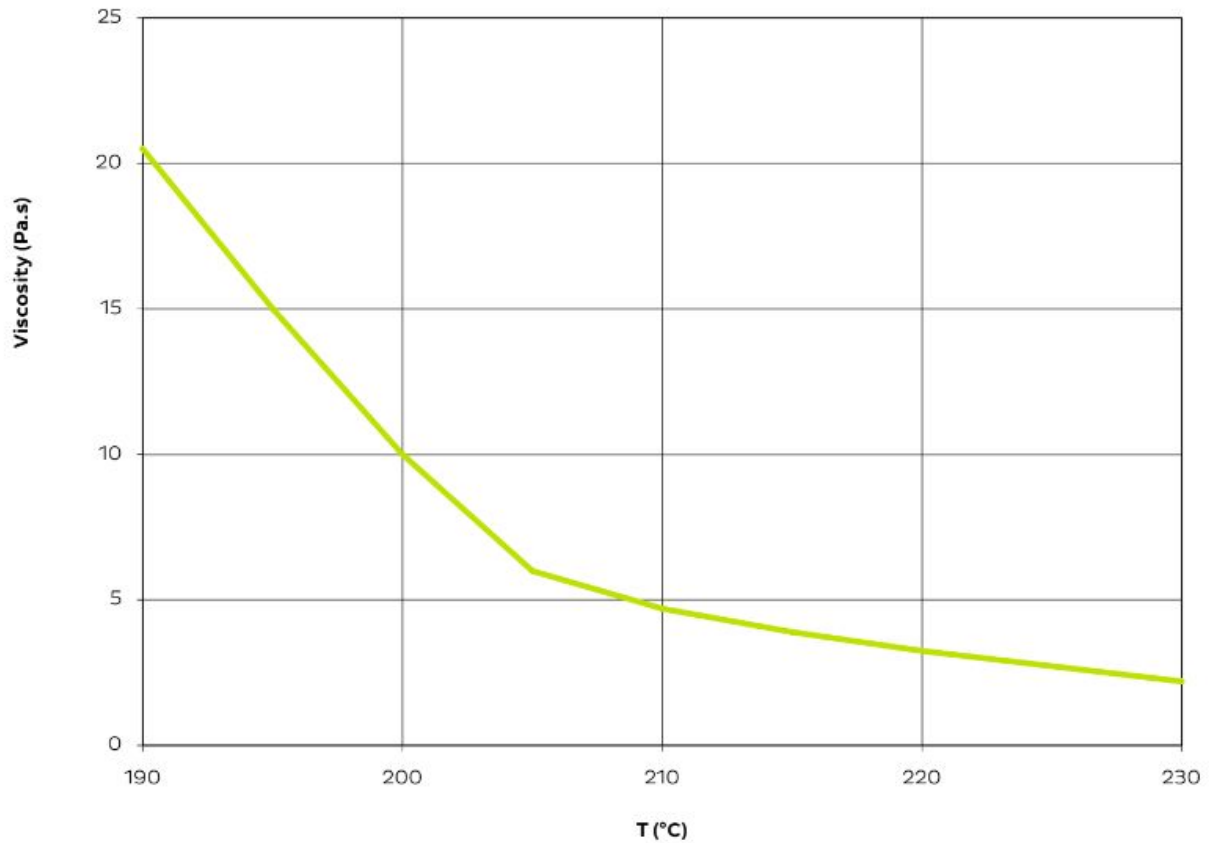

## Packaging

20kg bag

## Storage and Shelf life

The product has a shelf life of 18 months when properly stored in a cool and dry location in closed original packing. BS 867 will absorb moisture from the air. Because of risk of moisture absorption, we highly recommend to store any open bag in a close container.

Supplied by all CAPLINQ Global entities

### Europe

Industrieweg 15E,  
1566JN Assendelft  
The Netherlands  
Phone: +31 (20) 893 2224  
Email: info@caplinq.com

### Canada

80 Sirocco Crescent  
Ottawa ON, K2S 2C9  
Canada  
Phone: +1 (613) 482-2215  
Email: info@caplinq.com



### North America

36927 Schoolcraft Rd  
Livonia, MI 48150  
United States  
Phone: +1 (313) 558-8243  
Email: info@caplinq.com

### South East Asia

S-08-07 Persiaran Triangle  
B Lepas, Penang 11900  
Malaysia  
Phone: +60(12)4302223  
Email: info@caplinq.com